SIEMENS

Data sheet

3RV2032-4VA10



Circuit breaker size S2 for motor protection, CLASS 10 A-release 35...45 A N-release 650 A screw terminal increased switching capacity



product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S2
size of contactor can be combined company-specific	S2
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	24.5 W
 at AC in hot operating state per pole 	8.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms Sinus
mechanical service life (operating cycles)	
 of the main contacts typical 	50 000
 of auxiliary contacts typical 	50 000
electrical endurance (operating cycles) typical	50 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/15/2014
SVHC substance name	Lead - 7439-92-1
Weight	1.157 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Environmental footprint	
global warming potential [CO2 eq] total	239.877 kg
global warming potential [CO2 eq] during manufacturing	12.8 kg
global warming potential [CO2 eq] during sales	0.477 kg
global warming potential [CO2 eq] during operation	230 kg
global warming potential [CO2 eq] after end of life	-3.4 kg
Siemens Eco Profile (SEP)	Siemens EcoTech
Main circuit	

number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	35 45 A
operating voltage	
rated value	20 690 V
 at AC-3 rated value maximum 	690 V
 at AC-3e rated value maximum 	690 V
operating frequency rated value	50 60 Hz
operational current rated value	45 A
operational current	
• at AC-3 at 400 V rated value	45 A
• at AC-3e at 400 V rated value	45 A
operating power	
• at AC-3	
— at 230 V rated value	11 kW
— at 400 V rated value	22 kW
— at 500 V rated value	30 kW
— at 690 V rated value	37 kW
• at AC-3e	
— at 230 V rated value	11 kW
— at 400 V rated value	22 kW
— at 500 V rated value	30 kW
— at 690 V rated value	37 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Protective and monitoring functions	
product function	
ground fault detection	No
-	Yes
phase failure detection	CLASS 10
trip class design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	liema
at AC at 240 V rated value	100 kA
• at AC at 240 V rated value	100 KA
at AC at 500 V rated value	15 kA
at AC at 500 V rated value at AC at 690 V rated value	6 kA
operating short-circuit current breaking capacity (Ics) at AC	
at 240 V rated value	100 kA
	50 kA
at 400 V rated value	8 kA
at 500 V rated value	
at 690 V rated value	4 kA
response value current of instantaneous short-circuit trip unit	650 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	45 A
• at 600 V rated value	45 A
yielded mechanical performance [hp]	
for single-phase AC motor	
— at 110/120 V rated value	3 hp
— at 230 V rated value	10 hp
• for 3-phase AC motor	
— at 200/208 V rated value	15 hp
— at 220/230 V rated value	15 hp
— at 460/480 V rated value	40 hp
— at 460/480 V rated value — at 575/600 V rated value	
— at 460/480 V rated value	40 hp
— at 460/480 V rated value — at 575/600 V rated value	40 hp
 at 460/480 V rated value at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip 	40 hp 50 hp
 — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection 	40 hp 50 hp Yes


 e1 240 V e1 240 V e1 400 V e1 500 V<	EN 60715
• at 500 V 100 • at 690 V 80 Installation/mounting/climensions any festening method screw and snap-on mounting onto 35 mm DIN rail according to DIN height 140 mm width 55 mm depth 149 mm required spacing 0 mm • with side-by-side mounting at the side 0 mm • for grounded parts at 400 V 50 mm - downwards 50 mm - at the side 10 mm • for grounded parts at 400 V 50 mm - at worwards 50 mm - at the side 10 mm • for grounded parts at 500 V 60 mm - downwards 50 mm - at the side 10 mm • for grounded parts at 500 V 60 mm - downwards 50 mm - at the side 10 mm • for grounded parts at 500 V 60 mm - downwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 690 V 60 mm - downwards 50 mm	EN 60715
	EN 60715
Installation/ mounting/ dimensions mounting position any festening method screw and snap-on mounting onto 35 mm DIN rail according to DIN height 140 nm width 55 mm dopth 149 nm required spacing 0 mm • vith side-by-side mounting at the side 0 mm • for grounded parts at 400 V - downwards - downwards 50 mm - upwards 50 mm - at the side 10 mm • for live parts at 400 V - - downwards 50 mm - upwards 50 mm - downwards 50 mm - downwards 50 mm - upwards 50 mm - downwards 50 mm - athe s	EN 60715
mounting position any festening method screw and snap-on mounting onto 35 mm DIN rail according to DIN height 140 mm width 55 mm depth 149 mm required spacing 0 mm • for grounded parts at 400 V 0 mm - downwards 50 mm - upwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 400 V - - downwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 500 V - - downwards 50 mm - upwards 50 mm - at the side 10 mm • for live parts at 500 V - - downwards 50 mm - at the side 10 mm • for grounded parts at 690 V - - downwards 50 mm - at the side 10 mm • for live parts at 690 V - - downwards 50 mm	EN 60715
height 140 mm width 55 mm depth 149 mm required spacing 0 mm • with side-by-side mounting at the side 0 mm • for grounded parts at 400 V 50 mm — downwards 50 mm — upwards 50 mm — at the side 10 mm • for live parts at 400 V - — downwards 50 mm — upwards 50 mm — downwards 50 mm — upwards 50 mm	EN 60715
width 55 mm depth 149 mm required spacing 0 mm • with side-by-side mounting at the side 0 mm • for grounded parts at 400 V - downwards - upwards 50 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - downwards 50 mm - downwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 500 V - downwards - at the side 10 mm • for grounded parts at 500 V - downwards - at the side 10 mm • for grounded parts at 500 V - downwards - at the side 10 mm • for live parts at 500 V - downwards - upwards 50 mm - upwards 50 mm <t< td=""><td></td></t<>	
depth 149 mm required spacing 0 mm • with side-by-side mounting at the side 0 mm • for grounded parts at 400 V - - downwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 400 V - - at the side 10 mm • of the parts at 400 V - - at the side 10 mm • of upwards 50 mm - upwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 500 V - - downwards 50 mm - upwards 50 mm <td></td>	
required spacing 0 mm • with side-by-side mounting at the side 0 mm • for grounded parts at 400 V 50 mm - downwards 50 mm - upwards 50 mm - at the side 10 mm • for live parts at 400 V - - downwards 50 mm - downwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 500 V - - at the side 10 mm • for grounded parts at 500 V - - at the side 10 mm • for grounded parts at 500 V - - at the side 10 mm • for live parts at 500 V - - at the side 10 mm • for live parts at 500 V - - at the side 10 mm • for grounded parts at 690 V - - downwards 50 mm - upwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 690 V - - downwards 50 mm	
• with side-by-side mounting at the side 0 mm • for grounded parts at 400 V 50 mm - downwards 50 mm - upwards 50 mm - at the side 10 mm • for live parts at 400 V - - downwards 50 mm - downwards 50 mm - upwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 500 V - - downwards 50 mm - upwards 50 mm - at the side 10 mm • for grounded parts at 500 V - - downwards 50 mm - upwards 50 mm - at the side 10 mm • for live parts at 690 V - - downwards 50 mm - at the side 10 mm	
- downwards50 mm- upwards50 mm- at the side10 mm• for live parts at 400 V downwards50 mm- upwards50 mm- at the side10 mm- at the side10 mm- at the side10 mm- at the side10 mm- at the side50 mm- upwards50 mm- at the side10 mm- at the side50 mm- at the side10 mm- at the side50 mm- upwards50 mm- upwards50 mm- upwards50 mm- at the side10 mm- at the side10 mm- at the side10 mm- at the side50 mm- upwards50 mm- at the side10 mm </td <td></td>	
upwards50 mm at the side10 mm• for live parts at 400 V downwards50 mm upwards50 mm at the side10 mm• for grounded parts at 500 V downwards50 mm upwards50 mm upwards50 mm upwards50 mm upwards50 mm upwards50 mm at the side10 mm• for live parts at 500 V downwards50 mm upwards50 mm upwards50 mm at the side10 mm• for grounded parts at 690 V downwards50 mm at the side10 mm• for live parts at 690 V at the side10 mm at t	
at the side10 mm• for live parts at 400 V50 mm downwards50 mm upwards50 mm at the side10 mm• for grounded parts at 500 V downwards50 mm upwards50 mm upwards50 mm at the side10 mm at the side10 mm at the side10 mm downwards50 mm at the side10 mm• for live parts at 500 V downwards50 mm at the side10 mm• for grounded parts at 690 V downwards50 mm at the side10 mm• for grounded parts at 690 V downwards50 mm at the side10 mm• for live parts at 690 V downwards50 mm at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm <td< td=""><td></td></td<>	
• for live parts at 400 V	
- downwards50 mm- upwards50 mm- at the side10 mm• for grounded parts at 500 V downwards50 mm- upwards50 mm- upwards50 mm- at the side10 mm• for live parts at 500 V downwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- at the side10 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- at the side10 mm• for live parts at 690 V downwards50 mm- at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for numerations50 mm- at the side10 mm• for main current circuitscrew-type terminals• for main current circuitscrew-type terminals• for main current circuitscrew-type terminals	
upwards50 mm at the side10 mm• for grounded parts at 500 V50 mm downwards50 mm upwards50 mm at the side10 mm• for live parts at 500 V at the side10 mm• for live parts at 500 V downwards50 mm upwards50 mm upwards50 mm upwards50 mm upwards50 mm at the side10 mm• for grounded parts at 690 V downwards50 mm upwards50 mm at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for main current circuitscrew-type terminals at the side10 mm• for main current circuitscrew-type terminals• for main current circuitscrew-type terminals	
at the side10 mm at the side10 mm downwards50 mm upwards50 mm at the side10 mm at the side10 mm at the side10 mm at the side10 mm downwards50 mm downwards50 mm upwards50 mm upwards50 mm at the side10 mm at the side10 mm downwards50 mm at the side10 mm downwards50 mm upwards50 mm at the side10 mm downwards50 mm upwards50 mm at the side10 mm of rive parts at 690 V	
 for grounded parts at 500 V downwards upwards upwards at the side 10 mm for live parts at 500 V downwards for mix upwards for mix upwards 50 mm upwards 50 mm upwards 50 mm upwards for grounded parts at 690 V downwards for live parts at 690 V at the side 10 mm for live parts at 690 V at the side for mix current for electrical connectors for main current for pand bottom 	
- downwards50 mm- upwards50 mm- at the side10 mm• for live parts at 500 V downwards50 mm- upwards50 mm- upwards50 mm- at the side10 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- at the side10 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- upwards50 mm- at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm- at the side10 mm	
- upwards50 mm- at the side10 mm• for live parts at 500 V downwards50 mm- upwards50 mm- at the side10 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- downwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for live parts at 690 V at the side10 mm• for main current circuitscrew-type terminalstype of electrical connectionscrew-type terminals• for main current circuitscrew-type terminalsarrangement of electrical connectors for main current circuitTop and bottom	
at the side10 mm• for live parts at 500 V downwards50 mm- upwards50 mm- at the side10 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- upwards50 mm- at the side10 mm• for live parts at 690 V at the side50 mm- at the side10 mm• for live parts at 690 V at the side10 mm• for nive parts at 690 V at the side10 mm• for nive parts at 690 V at the side10 mm- at the side10 mm• for main current circuitscrew-type terminalstype of electrical connectors for main currentTop and bottom	
• for live parts at 500 V50 mm- downwards50 mm- upwards50 mm- at the side10 mm• for grounded parts at 690 V downwards50 mm- downwards50 mm- upwards50 mm- at the side10 mm• for live parts at 690 V at the side50 mm- at the side50 mm- at the side50 mm- downwards50 mm- at the side10 mm• for live parts at 690 V at the side10 mm- at the side10 mm- at the side10 mm- at the side50 mm- at the side10 mmConnections/ Terminals50 mm• for main current circuitscrew-type terminalsarrangement of electrical connectors for main current circuitTop and bottom	
- downwards50 mm- upwards50 mm- at the side10 mm• for grounded parts at 690 V50 mm- downwards50 mm- upwards50 mm- upwards50 mm- at the side10 mm• for live parts at 690 V downwards50 mm- at the side10 mm• for live parts at 690 V downwards50 mm- downwards50 mm- at the side10 mm- the side10 mm- at the side10 mm- at the side50 mm- at the side50 mm- at the side50 mm- at the side10 mm	
- at the side10 mm• for grounded parts at 690 V50 mm- downwards50 mm- upwards50 mm- at the side10 mm• for live parts at 690 V downwards50 mm• for live parts at 690 V downwards50 mm- at the side10 mm• for live parts at 690 V at the side50 mm- at the side50 mm- upwards50 mm- at the side10 mmConnections/Terminals10 mmtype of electrical connection • for main current circuitscrew-type terminalsarrangement of electrical connectors for main current circuitTop and bottom	
• for grounded parts at 690 V 50 mm - downwards 50 mm - upwards 50 mm - at the side 10 mm • for live parts at 690 V - - downwards 50 mm - downwards 50 mm - downwards 50 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - at the side 10 mm - at the side 10 mm Connections/ Terminals 50 mm type of electrical connection screw-type terminals • for main current circuit screw-type terminals arrangement of electrical connectors for main current circuit Top and bottom	
- downwards 50 mm - upwards 50 mm - at the side 10 mm • for live parts at 690 V - - downwards 50 mm - downwards 50 mm - upwards 50 mm - upwards 50 mm - at the side 10 mm Connections/ Terminals 10 mm type of electrical connection screw-type terminals arrangement of electrical connectors for main current circuit Top and bottom	
upwards50 mm at the side10 mm• for live parts at 690 V downwards50 mm upwards50 mm upwards50 mm at the side10 mmConnections/ Terminalstype of electrical connectionscrew-type terminals• for main current circuitscrew-type terminalsarrangement of electrical connectors for main current circuitTop and bottom	
at the side 10 mm • for live parts at 690 V - downwards 50 mm upwards 50 mm at the side 10 mm Connections/ Terminals 10 mm type of electrical connection • for main current circuit screw-type terminals arrangement of electrical connectors for main current circuit Top and bottom	
for live parts at 690 V — downwards 50 mm — upwards 50 mm — at the side 10 mm Connections/Terminals type of electrical connection e for main current circuit screw-type terminals arrangement of electrical connectors for main current circuit Top and bottom	
- downwards 50 mm - upwards 50 mm - at the side 10 mm Connections/Terminals type of electrical connection • for main current circuit screw-type terminals arrangement of electrical connectors for main current circuit Top and bottom	
— at the side 10 mm Connections/Terminals Image: Second Stress S	
Connections/ Terminals type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit Top and bottom	
type of electrical connection screw-type terminals • for main current circuit screw-type terminals arrangement of electrical connectors for main current circuit Top and bottom	
• for main current circuit screw-type terminals arrangement of electrical connectors for main current circuit Top and bottom	
arrangement of electrical connectors for main current Top and bottom	
circuit	
type of connectable conductor cross-sections	
for main contacts	
- solid or stranded 2x (1 35 mm ²), 1x (1 50 mm ²)	
- finely stranded with core end processing 2x (1 25 mm ²), 1x (1 35 mm ²)	
• for AWG cables for main contacts 2x (18 2), 1x (18 1)	
tightening torque	
for main contacts with screw-type terminals 3 4.5 N·m	
design of screwdriver shaft Diameter 5 to 6 mm size of the screwdriver tip Pozidriv size 2	
size of the screwdriver tip Pozidriv size 2 design of the thread of the connection screw Image: Connection screw	
for main contacts M6	
Safety related data	
product function suitable for safety function Yes	
suitability for use	
safety-related switching on No	
safety-related switching OFF Yes	
service life maximum 10 a	
test wear-related service life necessary Yes	
proportion of dangerous failures	
with low demand rate according to SN 31920 40 %	


• with high demand rate according to SN 31920	50 %	
B10 value with high demand rate according to SN 31920 failure rate [FIT] with low demand rate according to SN	5 000 50 FIT	
31920		
ISO 13849		
device type according to ISO 13849-1	3	
overdimensioning according to ISO 13849-2 necessary	Yes	
IEC 61508		
safety device type according to IEC 61508-2	Туре А	
 T1 value for proof test interval or service life according to IEC 61508 	10 a	
Electrical Safety		
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
Display		
display version for switching status	Handle	
Approvals Certificates		
General Product Approval		
	Confirmation KC	
General Product Approval For use in hazardous locations	Test Certificates Marine / Shipping	
	Special Test Certific- ate ates/Test Report	
Marine / Shipping	other	
BUREAU VERITAS	PRS RINA Miscellaneous	
other Railway	Environment	
Confirmation Special Test Ce ate		
Environment		
Environmental Con- firmations		
Further information Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2032-4VA10 Cax online generator		

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2032-4VA10 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV2032-4VA10 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2032-4VA10&lang=en Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RV2032-4VA10/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2032-4VA10&objecttype=14&gridview=view1

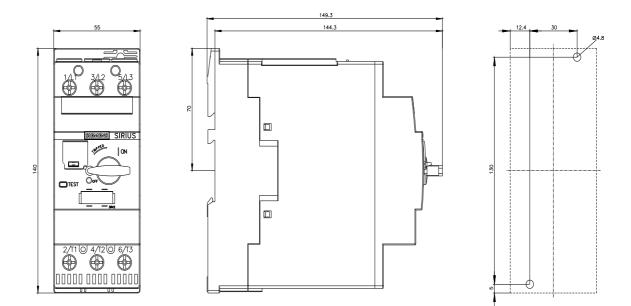

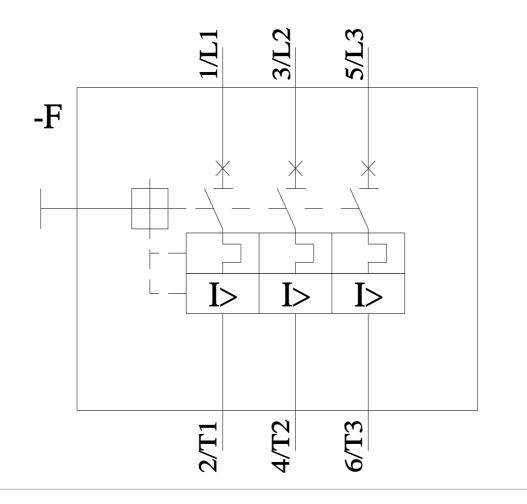

last modified:

11/6/2024 🖸