

Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8135-1DG13-2BA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	24.0	100.0	50.0	370	77.9	2,300	340	168.0	8,000	136.0	63	0.919	0.850	20.6
	BLM/SLM 400V	21.5	103.0	51.0	323	68.0	2,000	340	168.0	8,000	136.0	63	0.912	0.850	20.9
	ALM 480V	26.0	89.0	47.0	440	94.6	2,800	340	168.0	8,000	136.0	63	0.924	0.840	20.0
	BLM/SLM 480V	26.0	94.0	48.0	424	89.6	2,650	340	168.0	8,000	136.0	63	0.923	0.840	20.6

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	132
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B35 (IM V15, IM V35)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard with fixed bearing
Shaft end	Feather key with half key balancing
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.13 A
3 AC 400 V / 60 Hz (±10%)	0.16 A
3 AC 480 V / 60 Hz (±10%)	0.17 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	30 min
Moment of inertia	940 kgcm ²
Weight (approx.)	125 kg


Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	gk833




Cooling data and sound pressure level

Airflow, min.	0.09 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	140 Pa

Copyright(C) Siemens AG 2005



DIN 332 - DR M

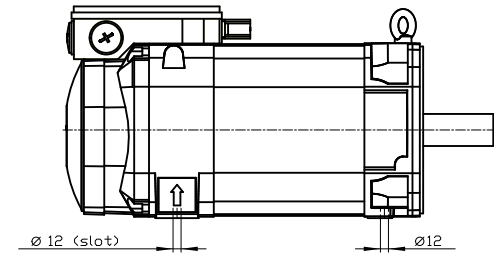

Type of construction IM B35 (IM V15, IM V35)		/ Type of protection: IP55	
			
Terminal box	gk833	1PH8135-1DG13-2BA1	
Weight	125 kg		
Unit	mm (in)		
Date	4/28/23		
SIEMENS AG			
not tolerated dimensions: ± 1		DT	