



Accessory 3WA/3WL Closing coil (CC) / Shunt trip (ST), 100% OP 24-30 V DC for continuous duty

Model	
product brand name	SETRON
product designation	Closing coil/shunt trip
design of the product	closing coil (CC) / shunt release (ST) 100% OP, 24 to 30 V DC, suitable for continuous duty
design of the fuse link	fuse gG: 2 A, miniature circuit breaker C characteristic: 2 A
closing active power [W]	60 W
operating active power [W]	8 W
make time (electrical) of circuit breaker at Us = 100%	80 ms
opening time (electrical) of circuit breaker at Us = 100%	80 ms
ambient temperature during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	80 °C

Approvals Certificates	
General Product Approval	Test Certificates



[Confirmation](#)



[Special Test Certificate](#)

Test Certificates	Marine / Shipping	other
-------------------	-------------------	-------



[Type Test Certificates/Test Report](#)



[Confirmation](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AD02>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AD02>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AD02

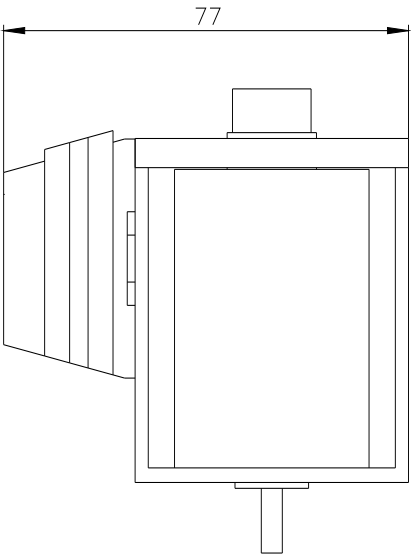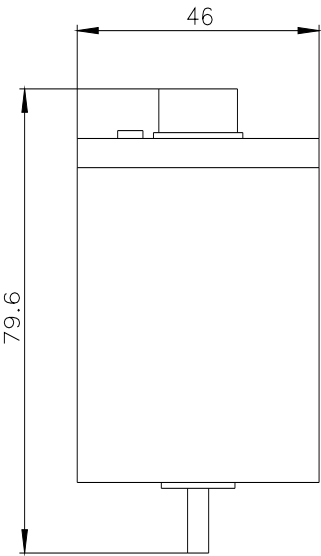

last modified:

9/9/2024 

