

Attachable block, 4-pole, 4 NO EN 50005 ! Phased-out product! Successor is SIRIUS 3RH2

General technical data	
product brand name	SIRIUS
suitability for use	Contactor relay and power contactor
protection class IP on the front	IP20
ambient temperature	
• during storage	-55 ... +80 °C
• during operation	-25 ... +60 °C
mechanical service life (switching cycles) typical	10 000 000
electrical endurance (switching cycles) at AC-15 at 230 V typical	200 000
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
Auxiliary circuit	
number of NC contacts for auxiliary contacts	
• instantaneous contact	0
number of NO contacts for auxiliary contacts	
• instantaneous contact	4
operational current of auxiliary contacts at AC-12	
• at 24 V	10 A
• at 230 V	10 A
• maximum	10 A
operational current	
• of auxiliary contacts	
— at AC-14	
— at 125 V	6 A
— at 250 V	6 A
— at AC-15	
— at 24 V	6 A
— at 230 V	6 A
— at 400 V	3 A
• at AC-15 at 690 V rated value	1 A
operational current	
• of auxiliary contacts at DC-12	
— at 24 V	10 A
— at 110 V	3 A
— at 220 V	1 A

<ul style="list-style-type: none"><li>• with 2 current paths in series at DC-12<ul style="list-style-type: none"><li>— at 24 V rated value</li><li>— at 60 V rated value</li><li>— at 110 V rated value</li><li>— at 220 V rated value</li><li>— at 440 V rated value</li><li>— at 600 V rated value</li></ul></li><li>• with 3 current paths in series at DC-12<ul style="list-style-type: none"><li>— at 24 V rated value</li><li>— at 60 V rated value</li><li>— at 110 V rated value</li><li>— at 220 V rated value</li><li>— at 440 V rated value</li><li>— at 600 V rated value</li></ul></li></ul>	10 A
	10 A
	4 A
	2 A
	1.3 A
	0.65 A
	10 A
	10 A
	10 A
	3.6 A
	2.5 A
	1.8 A
<b>operational current</b>	
<ul style="list-style-type: none"><li>• of auxiliary contacts at DC-13<ul style="list-style-type: none"><li>— at 24 V</li><li>— at 60 V</li><li>— at 110 V</li><li>— at 220 V</li></ul></li><li>• with 2 current paths in series at DC-13<ul style="list-style-type: none"><li>— at 24 V rated value</li><li>— at 60 V rated value</li><li>— at 110 V rated value</li><li>— at 220 V rated value</li><li>— at 440 V rated value</li><li>— at 600 V rated value</li></ul></li><li>• with 3 current paths in series at DC-13<ul style="list-style-type: none"><li>— at 24 V rated value</li><li>— at 60 V rated value</li><li>— at 110 V rated value</li><li>— at 220 V rated value</li><li>— at 440 V rated value</li><li>— at 600 V rated value</li></ul></li></ul>	6 A
	2 A
	1 A
	0.3 A
	10 A
	3.5 A
	1.3 A
	0.9 A
	0.2 A
	0.1 A
	10 A
	4.7 A
	3 A
	1.2 A
	0.5 A
	0.26 A
<b>Installation/ mounting/ dimensions</b>	
<b>fastening method</b>	snap-on mounting
<b>width</b>	44 mm
<b>height</b>	38 mm
<b>depth</b>	51 mm
<b>Connections/ Terminals</b>	
<b>type of electrical connection for auxiliary and control circuit</b>	screw-type terminals
<b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"><li>• for auxiliary contacts<ul style="list-style-type: none"><li>— finely stranded</li><li>— with core end processing</li></ul></li><li>• at AWG cables for auxiliary contacts</li></ul>	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) 2x (20 ... 16), 2x (18 ... 14)
<b>Safety related data</b>	
<b>product function mirror contact acc. to IEC 60947-4-1</b> <ul style="list-style-type: none"><li>• note</li></ul>	Yes with 3RT1
<b>product function positively driven operation acc. to IEC 60947-5-1</b>	No
<b>Certificates/ approvals</b>	
<b>General Product Approval</b>	<b>Functional Safety/Safety of Machinery</b>



[KC](#)



[Type Examination Certificate](#)

#### Declaration of Conformity

#### Test Certificates

#### Shipping Approval

[Miscellaneous](#)



EG-Konf.

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



ABS



BUREAU VERITAS

#### Shipping Approval

#### other

#### Railway



LRS



RINA



RMRS

[Confirmation](#)

[Special Test Certificate](#)

[Special Test Certificate](#)

#### Railway

[Type Test Certificates/Test Report](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH1921-1FA40>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH1921-1FA40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RH1921-1FA40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH1921-1FA40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH1921-1FA40&lang=en)

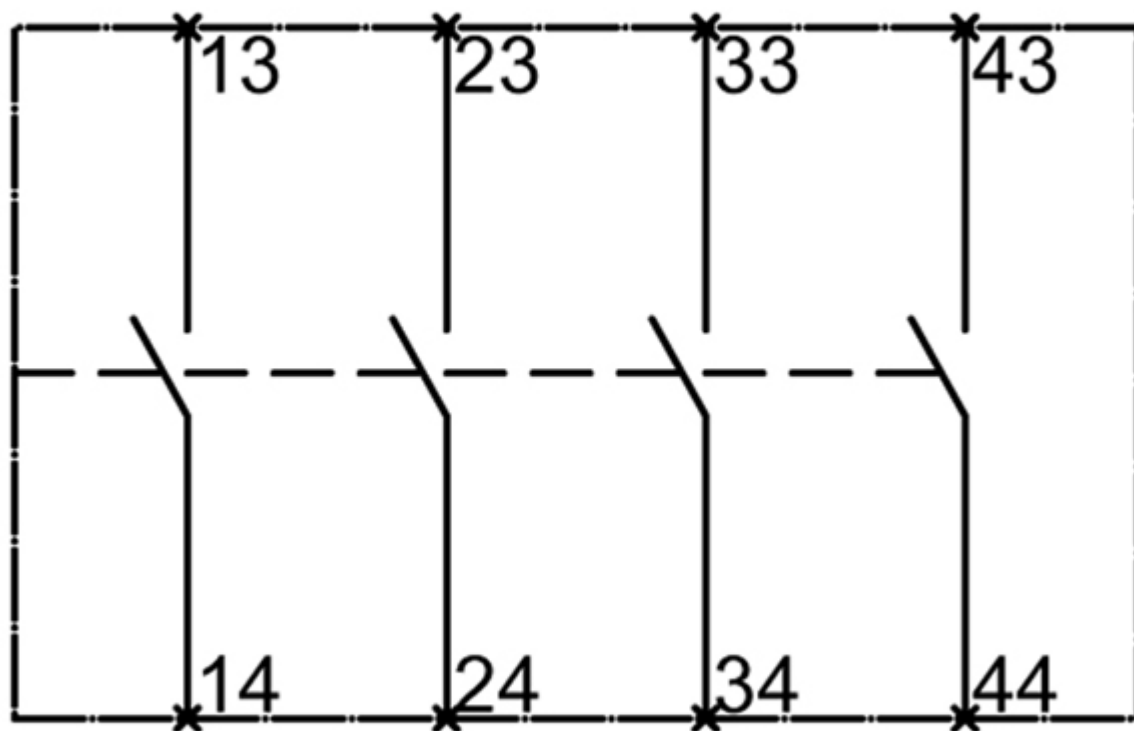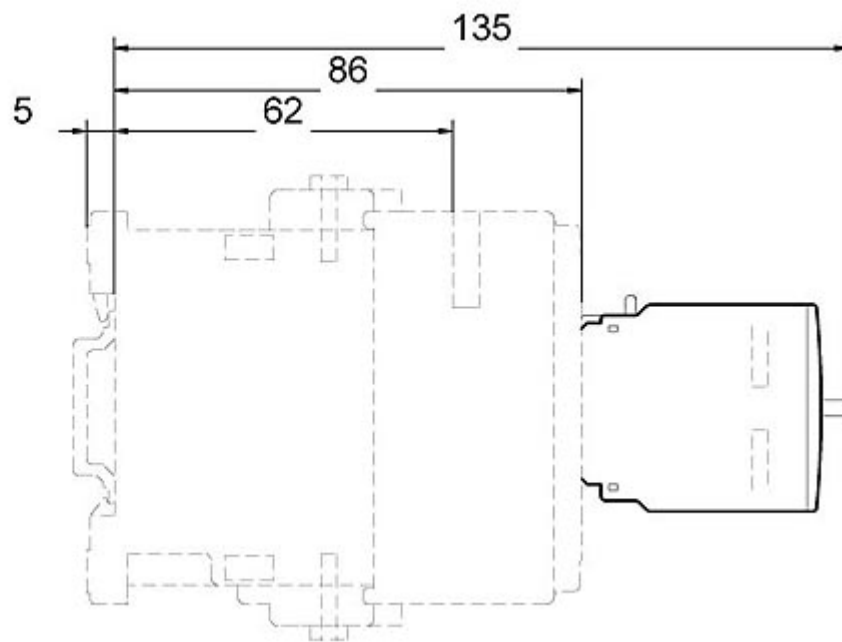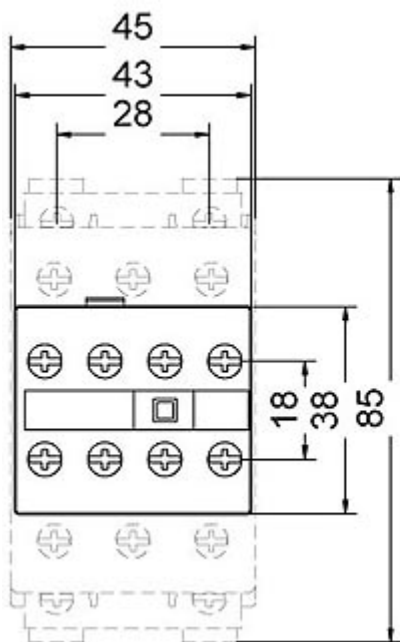

last modified:

11/19/2020

