




Accessory 3WA/3WL Closing coil (CC) 5% OP, 110-127 V AC / 110-125 V DC momentary duty, with cut-off switch, not for continuous duty

Model	
product brand name	SETRON
product designation	Closing coil
design of the product	closing coil (CC) 5% OP, 110 to 127 V AC / 110 to 125 V DC for momentary duty, with cut-off switch, no continuous duty possible
design of the fuse link	fuse gG: 4 A, miniature circuit breaker C characteristic: 4 A
closing apparent power [VA]	250 VA
operating apparent power [VA]	300 VA
closing active power [W]	300 W
make time (electrical) of circuit breaker at Us = 100%	50 ms
control supply voltage (Us) at AC rated value	110 to 127 V 50/60 Hz
ambient temperature during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	80 °C

Approvals Certificates	
General Product Approval	EMV

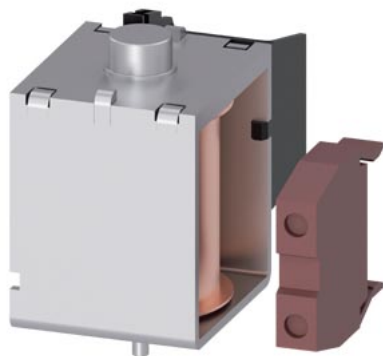

[Confirmation](#)



Test Certificates	Marine / Shipping	other	Dangerous goods
-------------------	-------------------	-------	-----------------

[Special Test Certificate](#)

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)





[Confirmation](#)

[Transport Information](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AD15>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AD15>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

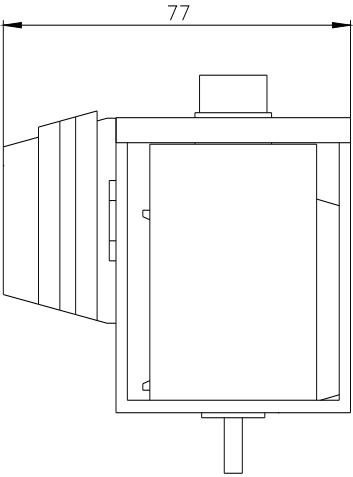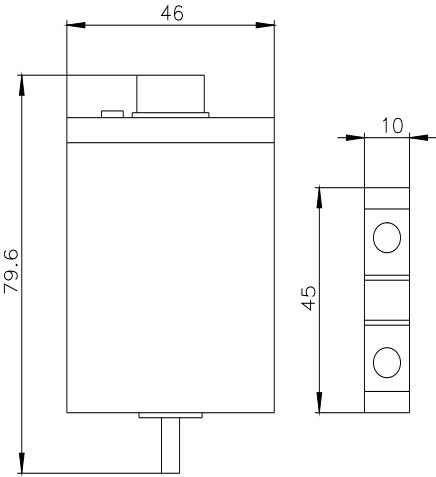

last modified:

9/9/2024 

