



auxiliary switch with 2 NO contacts, for 230 V/400 V AC for 5TT58 and 5TT50

Model	
product brand name	SETRON
product designation	auxiliary switches
design of the product	Mountable
design of the product factory mounted	No
Supply voltage	
operating voltage	
• rated value	230 V
Breaking Capacity	
switching capacity current rated value	6 A
Control current	
type of voltage of control voltage	AC
Product details	
number of fault signal contacts	0
number of NC contacts	0
number of NO contacts	2
number of CO contacts	0
product extension can be mounted	contactors / relays
product extension	Auxiliary current switch
Mechanical Design	
number of modular width units	1
net weight	41 g
Environmental footprint	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	1.11 kg
global warming potential [CO2 eq] during manufacturing	0.306 kg
global warming potential [CO2 eq] during operation	0.782 kg
global warming potential [CO2 eq] after end of life	0.018 kg
Approvals Certificates	
General Product Approval	



EG-Konf.

[Confirmation](#)

[Miscellaneous](#)



other	Environment
-------	-------------



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TT5910-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TT5910-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5910-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

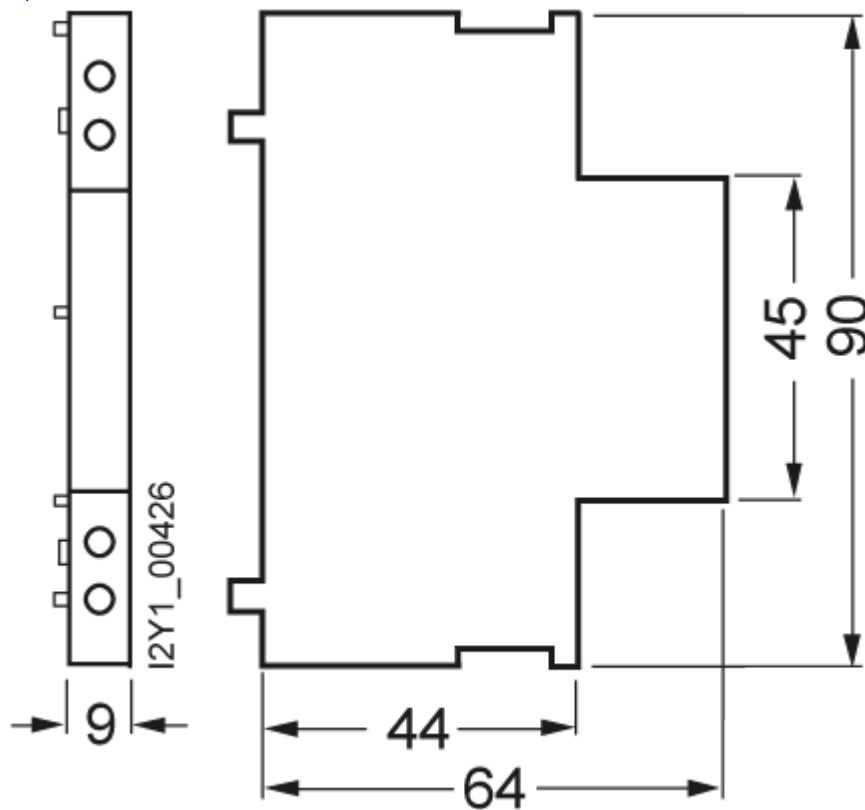

last modified:

6/15/2024

