


Selection	Cable exit	Direction of air flow				Dimensions	
			Type	S/A/B		a	c
*2D 250	S	"V"	A2D250-AA02 -01	S2D250-BA02 -01	W2D250-CA02 -01	83	27
		"A"	A2D250-AA02 -02	S2D250-BA02 -02	W2D250-CA02 -02	83	27
*2E 250	B	"V"	A2E 250-AE65 -01	S2E 250-BE65 -01	W2E 250-CE65 -01	83	27
		"A"	A2E 250-AE65 -02	S2E 250-BE65 -02	W2E 250-CE65 -02	83	27
*4D 250	S	"V"	A4D250-AA04 -01	S4D250-BA04 -01	W4D250-CA04 -01	73	19
		"A"	A4D250-AA04 -02	S4D250-BA04 -02	W4D250-CA04 -02	73	19
*4S 250	S	"V"	A4S 250-AA02 -01	S4S 250-BA02 -01	W4S 250-CA02 -01	73	19
		"A"	A4S 250-AA02 -02	S4S 250-BA02 -02	W4S 250-CA02 -02	73	19

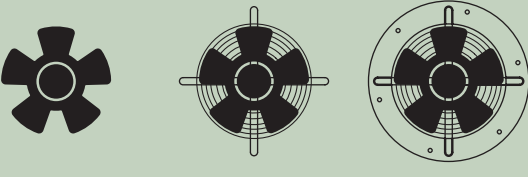