


operating cycles counter accessory for: SEO520



Model	
product brand name	SETRON
product designation	Operating cycles counter
accessories	Switching cycle counter
Mechanical Design	
ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	80 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	80 °C

Certificates		
General Product Approval	EMV	Test Certificates

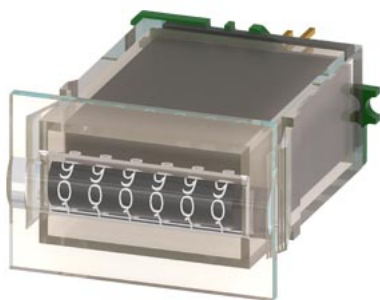

EG-Konf.



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping	other	Environment
-------------------	-------	-------------



LRS

[Miscellaneous](#)

[Confirmation](#)



[Miscellaneous](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9987-0HX10>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VA9987-0HX10>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9987-0HX10
CAx-Online-Generator
<http://www.siemens.com/cax>
Tender specifications

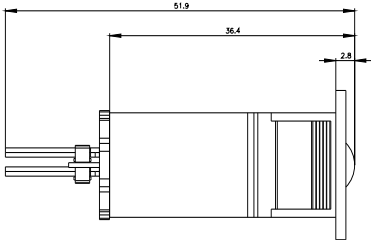

last modified:

5/26/2024

