

Siemens  
EcoTech



Circuit breaker size S3 for motor protection CLASS 10 with overload relay function  
A-release 45...63 A N-release 819 A screw terminal Increased switching capacity  
100 kA



|   |   |
|---|---|
| product brand name  | SIRIUS  |
| product designation   | Circuit breaker                                   |
| design of the product   | For motor protection with overload relay function |
| product type designation  | 3RV2  |
| <b>General technical data</b>                                   |   |
| size of the circuit-breaker                                     | S3  |
| size of contactor can be combined company-specific              | S3  |
| product extension auxiliary switch                              | Yes   |
| power loss [W] for rated value of the current                   |   |
| • at AC in hot operating state                                  | 34 W  |
| • at AC in hot operating state per pole                         | 11.3 W  |
| insulation voltage with degree of pollution 3 at AC rated value | 1 000 V   |
| surge voltage resistance rated value                            | 8 kV  |
| shock resistance according to IEC 60068-2-27                    | 25g / 11 ms Sinus                                 |
| mechanical service life (operating cycles)                      |   |
| • of the main contacts typical                                  | 25 000  |
| • of auxiliary contacts typical                                 | 25 000  |
| electrical endurance (operating cycles) typical                 | 25 000  |
| reference code according to IEC 81346-2                         | Q   |
| Substance Prohibitance (Date)                                   | 03/01/2017  |
| SVHC substance name   | Lead - 7439-92-1                                  |
| Weight  | 2.293 kg  |
| <b>Ambient conditions</b>                                       |   |
| installation altitude at height above sea level maximum         | 2 000 m   |
| ambient temperature   |   |
| • during operation  | -20 ... +60 °C                                    |
| • during storage  | -50 ... +80 °C                                    |
| • during transport  | -50 ... +80 °C                                    |
| relative humidity during operation                              | 10 ... 95 %                                       |
| <b>Environmental footprint</b>                                  |   |
| global warming potential [CO2 eq] total                         | 283.24 kg   |
| global warming potential [CO2 eq] during manufacturing          | 18.5 kg   |
| global warming potential [CO2 eq] during sales                  | 1.24 kg   |
| global warming potential [CO2 eq] during operation              | 265 kg  |
| global warming potential [CO2 eq] after end of life             | -1.5 kg   |
| Siemens Eco Profile (SEP)                                       | Siemens EcoTech                                   |
| <b>Main circuit</b>   |   |

|  |  |
|--|--|
| <b>number of poles for main current circuit</b>  | 3  |
| <b>adjustable current response value current of the current-dependent overload release</b>   | 45 ... 63 A  |
| <b>operating voltage</b> <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> <li>• at AC-3e rated value maximum</li> </ul>  | 20 ... 690 V<br>690 V<br>690 V   |
| <b>operating frequency rated value</b>   | 50 ... 60 Hz   |
| <b>operational current rated value</b>   | 63 A   |
| <b>operational current</b> <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> <li>• at AC-3e at 400 V rated value</li> </ul>   | 63 A<br>63 A   |
| <b>operating power</b> <ul style="list-style-type: none"> <li>• at AC-3               <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>• at AC-3e               <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul>       | 18.5 kW<br>30 kW<br>37 kW<br>55 kW<br><br>18.5 kW<br>30 kW<br>37 kW<br>55 kW |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> </ul>   | 15 1/h<br>15 1/h   |
| <b>Auxiliary circuit</b>   |  |
| <b>number of NC contacts for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• note</li> </ul>   | 1  |
| <b>number of NO contacts for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• note</li> </ul>   | 1  |
| <b>Protective and monitoring functions</b>   |  |
| <b>product function</b> <ul style="list-style-type: none"> <li>• ground fault detection</li> <li>• phase failure detection</li> </ul>  | No<br>Yes  |
| <b>trip class</b>  | CLASS 10   |
| <b>design of the overload release</b>  | thermal  |
| <b>maximum short-circuit current breaking capacity (Icu)</b> <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul>  | 100 kA<br>100 kA<br>15 kA<br>7.5 kA  |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b> <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>  | 100 kA<br>50 kA<br>7.5 kA<br>4 kA  |
| <b>response value current of instantaneous short-circuit trip unit</b>   | 819 A  |
| <b>UL/CSA ratings</b>  |  |
| <b>full-load current (FLA) for 3-phase AC motor</b> <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>   | 63 A<br>63 A   |
| <b>yielded mechanical performance [hp]</b> <ul style="list-style-type: none"> <li>• for single-phase AC motor               <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor               <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | 5 hp<br>15 hp<br><br>20 hp<br>25 hp<br>50 hp<br>60 hp                        |

| Short-circuit protection   |  |
|--|--|
| product function short circuit protection  | Yes  |
| design of the short-circuit trip   | magnetic   |
| Installation/ mounting/ dimensions   |  |
| mounting position  | any  |
| fastening method   | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| height   | 165 mm   |
| width  | 90 mm  |
| depth  | 176 mm   |
| required spacing   |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> </ul>   | 0 mm   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>                           | 70 mm  |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>  | 70 mm  |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>  | 10 mm  |
| <ul style="list-style-type: none"> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>                               | 70 mm  |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>  | 70 mm  |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>  | 10 mm  |
| <ul style="list-style-type: none"> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>                           | 110 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>  | 110 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>  | 10 mm  |
| <ul style="list-style-type: none"> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>                               | 110 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>  | 110 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>  | 10 mm  |
| <ul style="list-style-type: none"> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>                           | 150 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>  | 150 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— backwards</li> </ul> </li> </ul>  | 0 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>  | 30 mm  |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul>   | 0 mm   |
| <ul style="list-style-type: none"> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>                               | 150 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>  | 150 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— backwards</li> </ul> </li> </ul>  | 0 mm   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>  | 30 mm  |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul>   | 0 mm   |
| Connections/ Terminals   |  |
| type of electrical connection  |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>   | screw-type terminals   |
| <ul style="list-style-type: none"> <li>• for auxiliary and control circuit</li> </ul>  | screw-type terminals   |
| arrangement of electrical connectors for main current circuit  | Top and bottom   |
| type of connectable conductor cross-sections   |  |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> </ul> </li> </ul>   | 2x (2.5 ... 16 mm <sup>2</sup> )   |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— solid or stranded</li> </ul> </li> </ul>  | 2x (2.5 ... 50 mm <sup>2</sup> ), 1x (10 ... 70 mm <sup>2</sup> )        |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul> </li> </ul>                         | 2x (2.5 ... 35 mm <sup>2</sup> ), 1x (2.5 ... 50 mm <sup>2</sup> )       |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— finely stranded without core end processing</li> </ul> </li> </ul>                      | 2x (10 ... 35 mm <sup>2</sup> ), 1x (10 ... 50 mm <sup>2</sup> )         |
| type of connectable conductor cross-sections   |  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul> </li> </ul> | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )    |
| <ul style="list-style-type: none"> <li>• for AWG cables for auxiliary contacts</li> </ul>  | 2x (20 ... 16), 2x (18 ... 14)   |
| tightening torque  |  |
| <ul style="list-style-type: none"> <li>• for main contacts for ring cable lug</li> </ul>   | 4.5 ... 6 N·m  |
| outer diameter of the usable ring cable lug maximum  | 19 mm  |
| tightening torque  |  |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>  | 4.5 ... 6 N·m  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts with screw-type terminals</li> </ul>   | 0.8 ... 1.2 N·m  |

|  |  |
|--|--|
| <b>design of the thread of the connection screw</b>                  |  |
| • of the auxiliary and control contacts                              | M3   |
| <b>Safety related data</b>   |  |
| product function suitable for safety function                        | Yes  |
| <b>suitability for use</b>   |  |
| • safety-related switching on  | No   |
| • safety-related switching OFF                                       | Yes  |
| <b>service life maximum</b>  | 10 a   |
| <b>test wear-related service life necessary</b>                      | Yes  |
| <b>proportion of dangerous failures</b>                              |  |
| • with low demand rate according to SN 31920                         | 40 %   |
| • with high demand rate according to SN 31920                        | 50 %   |
| <b>B10 value with high demand rate according to SN 31920</b>         | 5 000  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 50 FIT   |
| <b>ISO 13849</b>   |  |
| <b>device type according to ISO 13849-1</b>                          | 3  |
| <b>overdimensioning according to ISO 13849-2 necessary</b>           | Yes  |
| <b>IEC 61508</b>   |  |
| <b>safety device type according to IEC 61508-2</b>                   | Type A   |
| <b>T1 value</b>  |  |
| • for proof test interval or service life according to IEC 61508     | 10 a   |
| <b>Electrical Safety</b>   |  |
| <b>protection class IP on the front according to IEC 60529</b>       | IP20   |
| <b>touch protection on the front according to IEC 60529</b>          | finger-safe, for vertical contact from the front |
| <b>Display</b>   |  |
| display version for switching status                                 | Handle   |
| <b>Approvals Certificates</b>  |  |
| <b>General Product Approval</b>                                      |  |



[Confirmation](#)



[KC](#)

| General Product Approval | Test Certificates | Marine / Shipping |
|--------------------------|-------------------|-------------------|
|--------------------------|-------------------|-------------------|



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



| Marine / Shipping | other |
|-------------------|-------|
|-------------------|-------|



[Miscellaneous](#)

[Confirmation](#)



| Railway | Environment |
|---------|-------------|
|---------|-------------|

[Confirmation](#)

[Special Test Certificate](#)



[Environmental Confirmations](#)

| Further information |
|---------------------|
|---------------------|

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2142-4JA10>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2142-4JA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2142-4JA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2142-4JA10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2142-4JA10&lang=en)


Characteristic: Tripping characteristics,  $I^2t$ , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2142-4JA10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2142-4JA10&objecttype=14&gridview=view1>

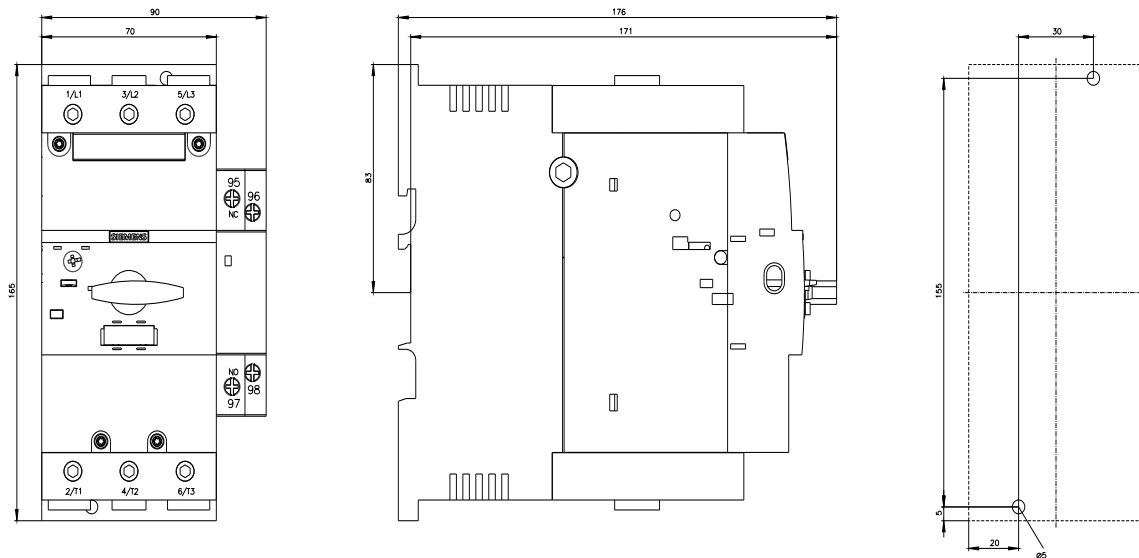

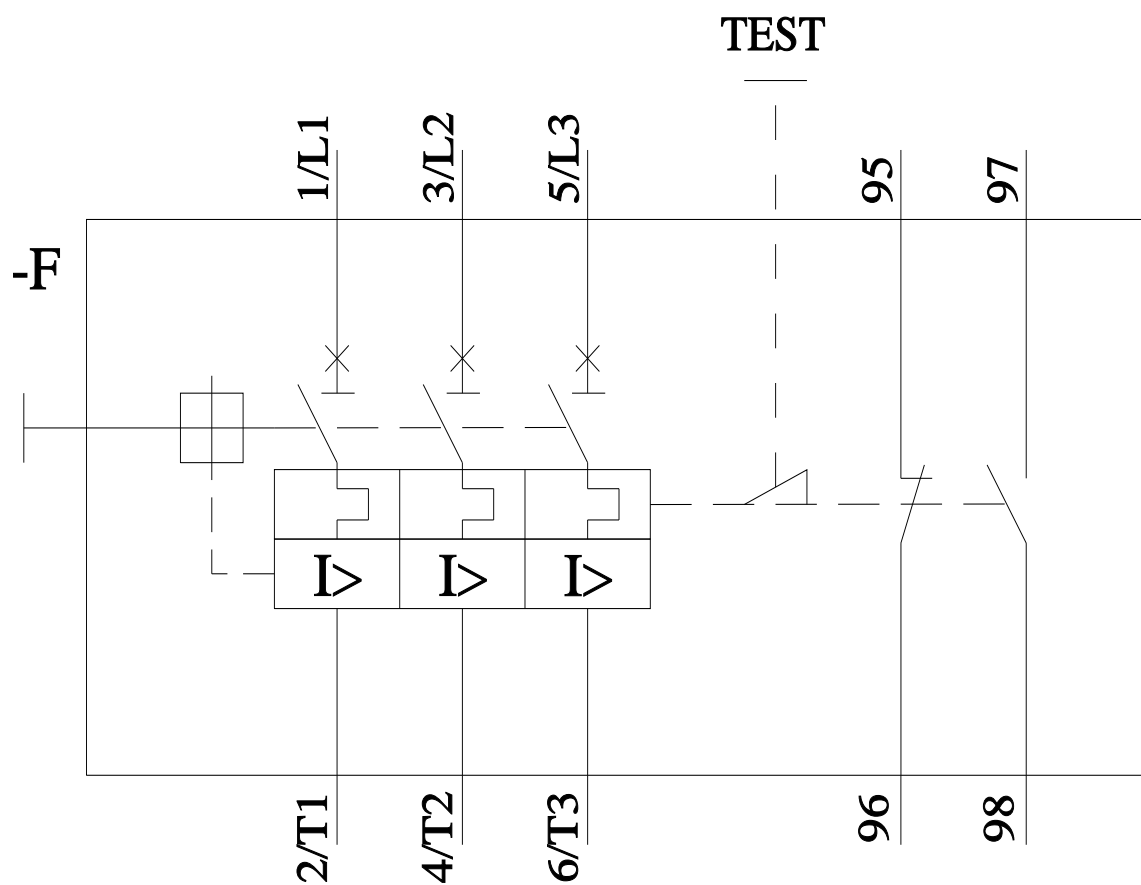

last modified:

11/6/2024 