


IB IL 24 DO 2-2A - Inline terminal

2726243

<https://www.phoenixcontact.com/be/products/2726243>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Inline digital output terminal, without accessories, 2 outputs, 24 V DC, 2 A, 4-conductor connection technology

Product description

The terminal is designed for use within an Inline station. It is used to output digital signals.

Your advantages

- 2 digital outputs
- Connection of actuators in 2-, 3-, and 4-conductor technology
- Short-circuit and overload-protected outputs
- Total current of the terminal: 4 A
- Nominal current per output: 2 A
- Diagnostic and status indicators

Commercial data

Item number	2726243
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DRI132
Catalog page	Page 67 (AX-2007)
GTIN	4017918168100
Weight per piece (including packing)	66,9 g
Weight per piece (excluding packing)	52,59 g
Country of origin	DE

IB IL 24 DO 2-2A - Inline terminal



2726243

<https://www.phoenixcontact.com/be/products/2726243>

Technical data

Product properties

Type	modular
No. of channels	2
Diagnostics messages	Short-circuit or overload of the digital outputs Error message in the diagnostic code (bus) and display (2 Hz) via the LED (D) on the module

System properties

Module

ID code (dec.)	189
ID code (hex)	BD
Length code (hex)	C2
Length code (dec)	194
Process data channel	2 bit
Input address area	0 Byte
Output address area	2 bit
Register length	2 bit
Required parameter data	3 Byte

Electrical properties

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 35 mA

Potentials: Segment circuit supply (U_S)

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 4 A

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply, incoming remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 5 V supply, outgoing remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 7.5 V supply (bus logics)/24 V supply (I/O)	500 V AC, 50 Hz, 1 min.
Test voltage: 24 V supply (I/O) / functional ground	500 V AC, 50 Hz, 1 min.

Output data

Digital:

Output name	Digital outputs
Connection method	Spring-cage connection
Connection technology	2-, 3-, 4-conductor

IB IL 24 DO 2-2A - Inline terminal



2726243

<https://www.phoenixcontact.com/be/products/2726243>

Number of outputs	2
Protective circuit	Overload protection, short-circuit protection of outputs
Output voltage	24 V DC ($U_S - 1\text{ V}$)
Maximum output current per channel	2 A
Maximum output current per module	4 A
Nominal output voltage	24 V DC (voltage difference at $I_{\text{nom}} \leq 1\text{ V}$)
Nominal load, inductive	48 W
Nominal load, lamp	48 W
Nominal load, ohmic	48 VA
Behavior with overload	Auto restart
Behavior with inductive overload	Output can be destroyed
Behavior at voltage switch-off	The output follows the power supply without delay

Connection data

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16

Interfaces

Inline local bus


Connection method	Inline data jumper
Transmission speed	500 kbps

Signaling

Diagnostic messages

Diagnostics	Short-circuit or overload of the digital outputs
Message	Error message in the diagnostic code (bus) and display (2 Hz) via the LED (D) on the module

Dimensions

Dimensional drawing	
Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

IB IL 24 DO 2-2A - Inline terminal



2726243

<https://www.phoenixcontact.com/be/products/2726243>

Material specifications

Color	green
-------	-------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

IB IL 24 DO 2-2A - Inline terminal


2726243

<https://www.phoenixcontact.com/be/products/2726243>




Drawings

Dimensional drawing

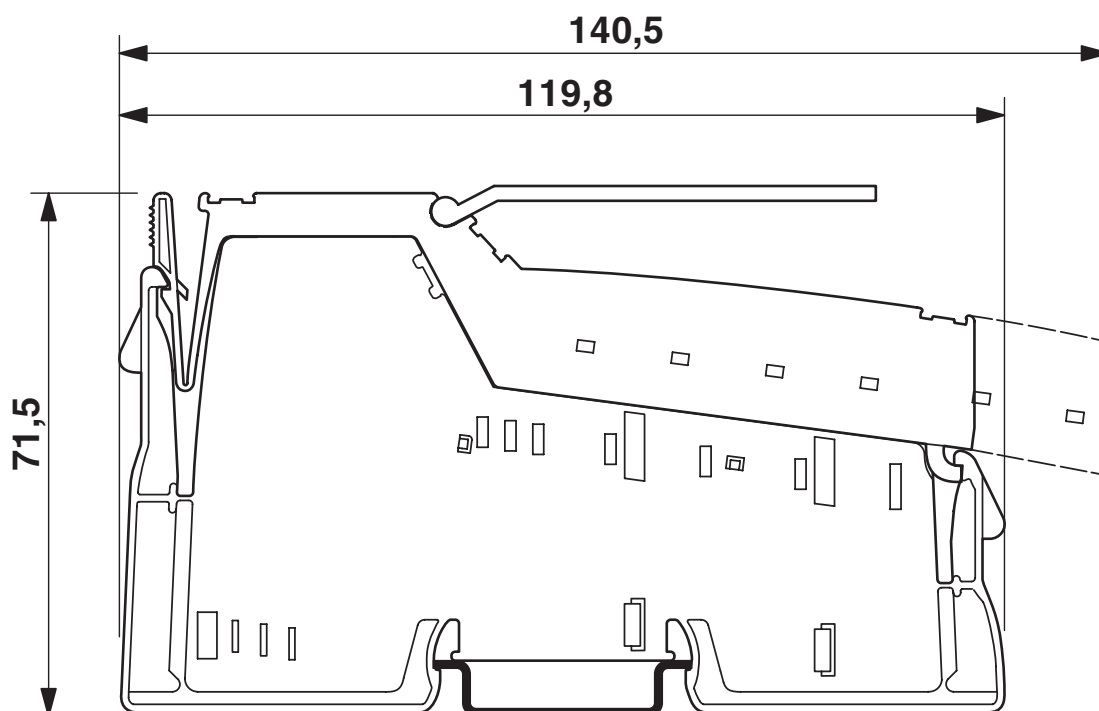

Connection diagram

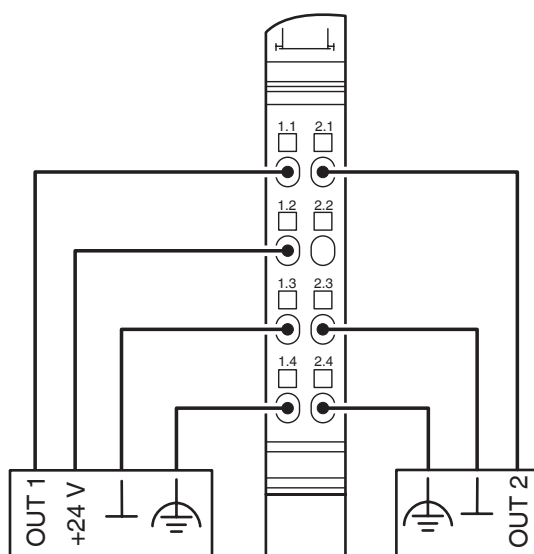


IB IL 24 DO 2-2A - Inline terminal

2726243

<https://www.phoenixcontact.com/be/products/2726243>



Block diagram

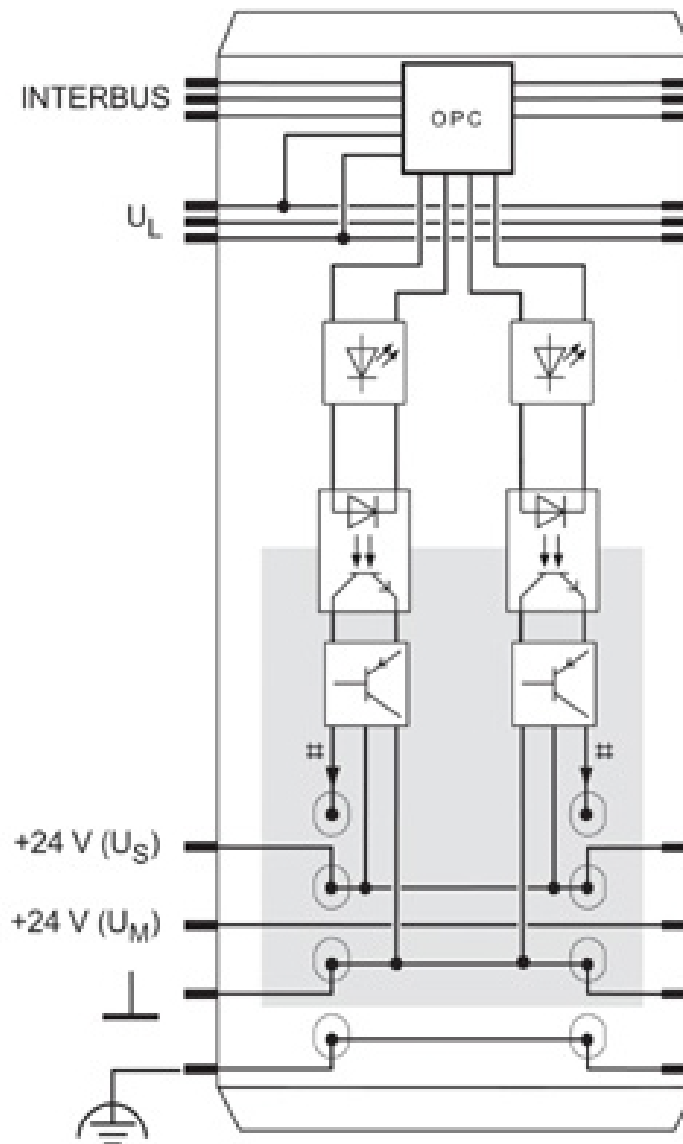

IB IL 24 DO 2-2A - Inline terminal



2726243

<https://www.phoenixcontact.com/be/products/2726243>

Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

IB IL 24 DO 2-2A - Inline terminal

2726243

<https://www.phoenixcontact.com/be/products/2726243>



Accessories

IB IL FIELD 2 - Marking field

2727501

<https://www.phoenixcontact.com/be/products/2727501>

Marking field, width: 12.2 mm



IB IL FIELD 8 - Marking field

2727515

<https://www.phoenixcontact.com/be/products/2727515>

Marking field, width: 48.8 mm



IB IL 24 DO 2-2A - Inline terminal

2726243

<https://www.phoenixcontact.com/be/products/2726243>



ESL 62X10 - Insert strip

0809492

<https://www.phoenixcontact.com/be/products/0809492>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, CMS-P1-PLOTTER, mounting type: insert, lettering field size: 62 x 10 mm, Number of individual labels: 72



ESL 62X46 - Insert strip

0809502

<https://www.phoenixcontact.com/be/products/0809502>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, CMS-P1-PLOTTER, mounting type: insert, lettering field size: 62 x 46 mm, Number of individual labels: 15



IB IL 24 DO 2-2A - Inline terminal

2726243

<https://www.phoenixcontact.com/be/products/2726243>



IB IL SCN-8-CP - Inline connector

2727608

<https://www.phoenixcontact.com/be/products/2727608>

Inline connector, colored



IB IL SCN-8 - Inline connector

2726337

<https://www.phoenixcontact.com/be/products/2726337>

Connector, for digital 1, 2 or 8-channel Inline terminals



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT nv/sa
Minervastraat 10-12
1930 Zaventem-Keiberg II
+32 (0)2/723 98 11
info@phoenixcontact.be