

IB ST 24 AO 4/BP - I/O module



2752521

<https://www.phoenixcontact.com/us/products/2752521>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



INTERBUS-ST analog output module, D/A resolution 13-bit, 4 outputs, -10 V to +10 V, consisting of: Terminal part with screw connection and module electronics

Product description

INTERBUS ST analog output modules

These INTERBUS analog output modules can be used to connect all actuators which work with the standardized voltage or current ranges 0-10 V or 0 (4) - 20 mA or -10 V to +10 V.

- Both signals are made available simultaneously for all channels, so that "current" and "voltage" actuators can be mixed.
- All commercially available actuators can be connected without additional interconnecting terminals.
- Diagnostic LEDs provide information on the operating status at any time.
- All modules can be individually labeled on the large pull-out labeling field. The insert cards can be prepared by hand, or by plotter or printer.
- In the event of failure or malfunction, the electronics of the module can be easily replaced. The passive termination block remains mounted on the rail. This means that the replacement process can be carried out in a just a few seconds and without the need for tools.
- The fuses are accessible from outside, so that a fault can be cleared quickly.
- The connection to protective earth ground is made directly via the DIN rail.
- The conventional labeling materials (Zack strip ZB-6, etc.) can be used to label the termination blocks.

Your advantages

- Standard signal types (voltage and current)
- Temperature measurement modules

Commercial data

Item number	2752521
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	DR03
Product key	DRI342
Catalog page	Page 251 (C-8-2013)
GTIN	4017918105112
Weight per piece (including packing)	650.5 g
Weight per piece (excluding packing)	600 g
Customs tariff number	85389091
Country of origin	DE

IB ST 24 AO 4/BP - I/O module




2752521

<https://www.phoenixcontact.com/us/products/2752521>

Technical data

Dimensions

Dimensional drawing	
Width	118 mm
Height	117 mm
Length	116 mm

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Interfaces

ST local bus

Connection method	ST local bus connector
Transmission speed	500 kbps

Product properties

Product type	I/O component
Product family	Smart Terminal ST
Type	modular INTERBUS Smart Terminal
No. of channels	4

Electrical properties

Maximum power dissipation for nominal condition	3.6 W
Test section	Bus/Outputs 500 V AC 50 Hz 1 min. Supply voltage/Outputs 500 V AC 50 Hz 1 min. Supply voltage/Ground conductor 500 V AC 50 Hz 1 min. I/O voltage/Ground conductor 500 V AC 50 Hz 1 min.

Supply

Communications power U_L	9 V DC (from the ST local bus)
I/O voltage	± 24 V DC 5 % (ripple)
I/O voltage range	18.5 V DC ... 30.2 V DC
Typical current consumption	150 mA (at U_S)

Connection data

Connection technology

Connection name	Terminal block
-----------------	----------------

Conductor connection

Connection method	Screw connection
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12
Stripping length	8 mm

Terminal block

Connection method	Screw connection
Conductor cross section, rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
----------------------	------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------


IB ST 24 AO 4/BP - I/O module

2752521

<https://www.phoenixcontact.com/us/products/2752521>



Drawings

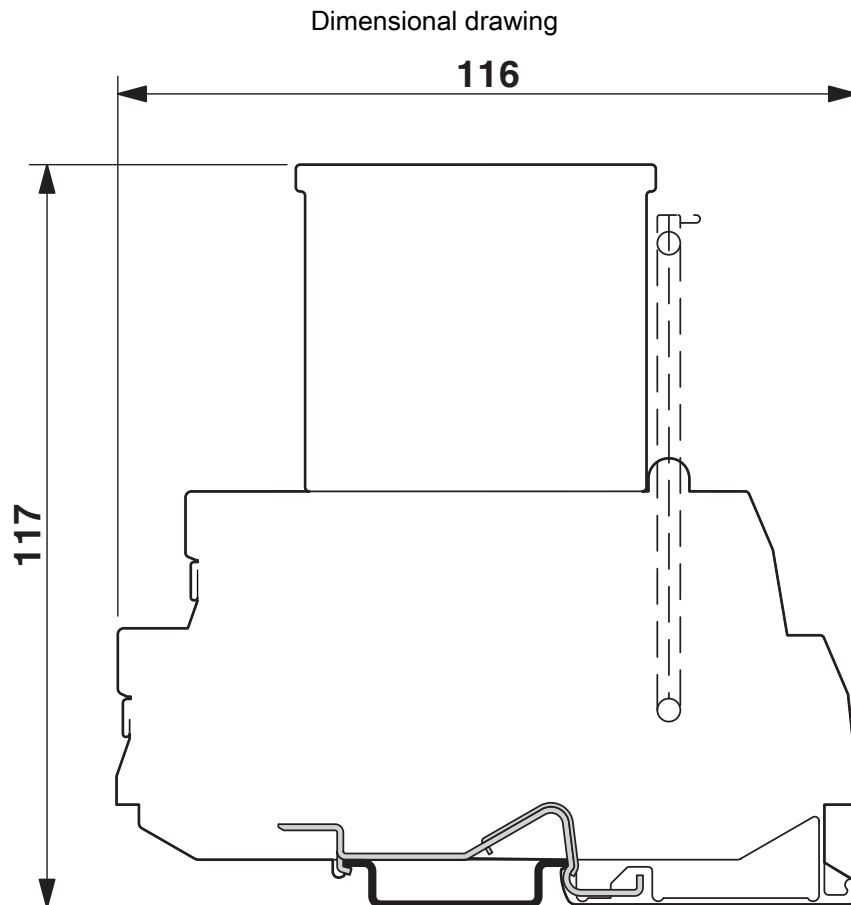


IB ST 24 AO 4/BP - I/O module

2752521

<https://www.phoenixcontact.com/us/products/2752521>



Connection diagram

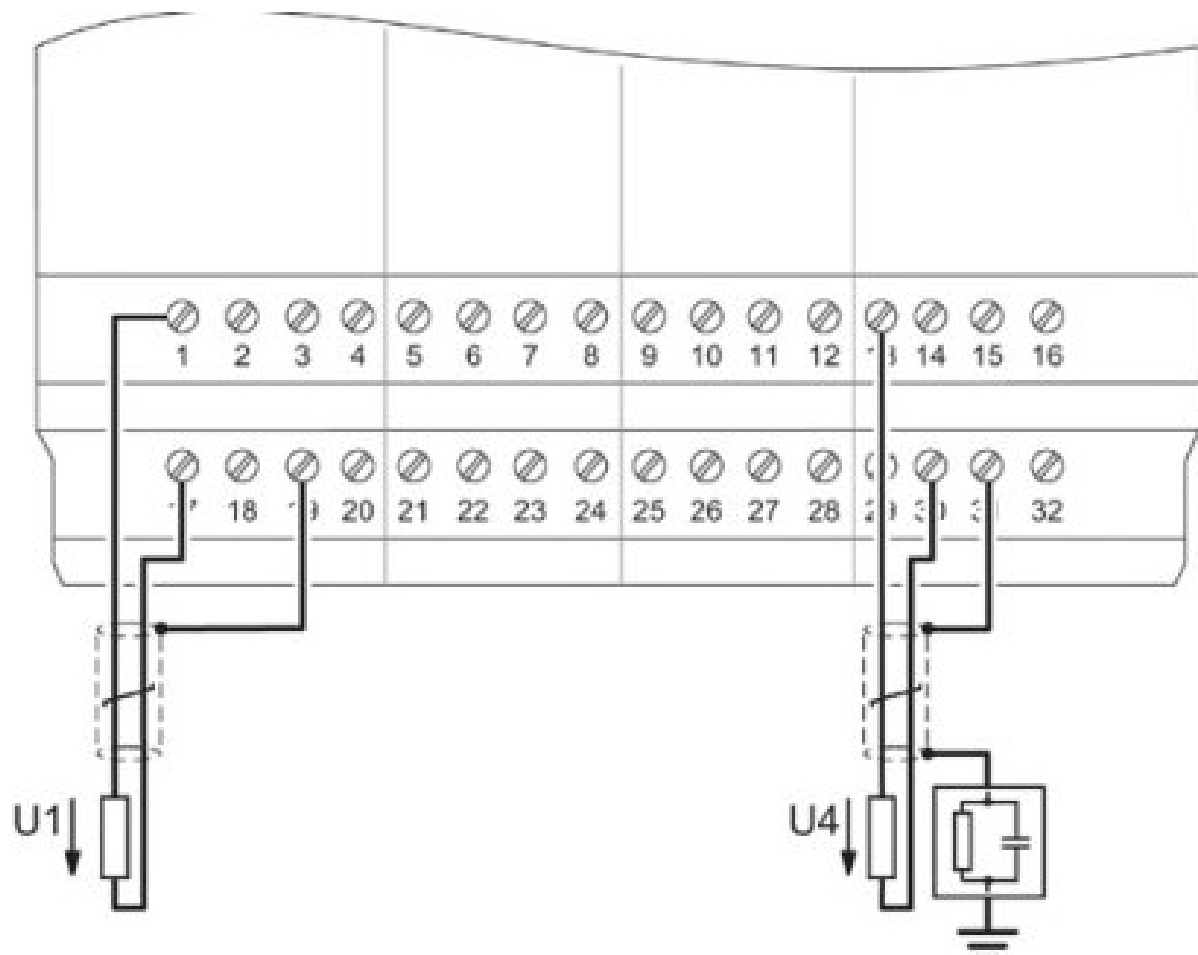

IB ST 24 AO 4/BP - I/O module



2752521

<https://www.phoenixcontact.com/us/products/2752521>

Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

IB ST 24 AO 4/BP - I/O module

2752521

<https://www.phoenixcontact.com/us/products/2752521>



Accessories

IB STME 24 AO 4/BP - Replacement electronics module

2750206

<https://www.phoenixcontact.com/us/products/2750206>

Replacement module electronics for IB ST (ZF) 24 AO 4/BP




IB ST LBC - Bridge

2836492

<https://www.phoenixcontact.com/us/products/2836492>

Spare local bus cable, for INTERBUS-ST modules



IB ST 24 AO 4/BP - I/O module

2752521

<https://www.phoenixcontact.com/us/products/2752521>



IBS TR5 0,4AT - Fuse

2753478

<https://www.phoenixcontact.com/us/products/2753478>



Replacement fuse, for INTERBUS-ST modules

EB 84 IB ST BU - Insertion bridge

2836269

<https://www.phoenixcontact.com/us/products/2836269>



Insertion bridges, divisible, isolated comb spine, color blue, 84-pos.

IB ST 24 AO 4/BP - I/O module

2752521

<https://www.phoenixcontact.com/us/products/2752521>



EB 84 IB ST RD - Insertion bridge

2836272

<https://www.phoenixcontact.com/us/products/2836272>



Insertion bridges, divisible, isolated comb spine, color red, 84-pos.

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com