


Accessory for 3KD size 1/2, 3KF size 1 3KC0 size 1/2, Auxiliary switch 1 change-over contact, solid-state-compatible without connecting cable



Model	
product brand name	SETRON
product designation	Accessories for switch disconnectors
design of the product	Auxiliary switch
Auxiliary circuit	
number of CO contacts of auxiliary contacts instantaneous contact	1
number of NC contacts for auxiliary contacts instantaneous contact	0
number of NO contacts for auxiliary contacts instantaneous contact	0
operational current of auxiliary contacts	
• at AC-13 at 230 V	0.1 A
Suitability	
suitability for use	For 3KD sizes 1 and 2
Product details	
product description	1 CO contact, solid-state compatible
Connections	
type of electrical connection	Without soldered-on cable
• for auxiliary and control circuit	Soldering tag connection
Mechanical Design	
fastening method	Can be plugged in and integrated
net weight	1.5 g
Approvals Certificates	
General Product Approval	

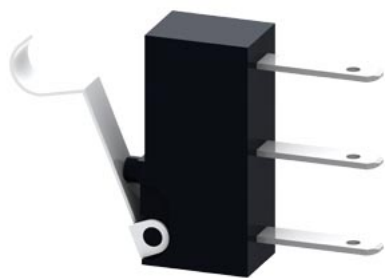

[Confirmation](#)



[Miscellaneous](#)

General Product Approval	Test Certificates	Marine / Shipping	other	Environment
--------------------------	-------------------	-------------------	-------	-------------



[Type Test Certificates/Test Report](#)



[Miscellaneous](#)

[Confirmation](#)

[Environmental Confirmations](#)

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD9103-4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KD9103-4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD9103-4


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

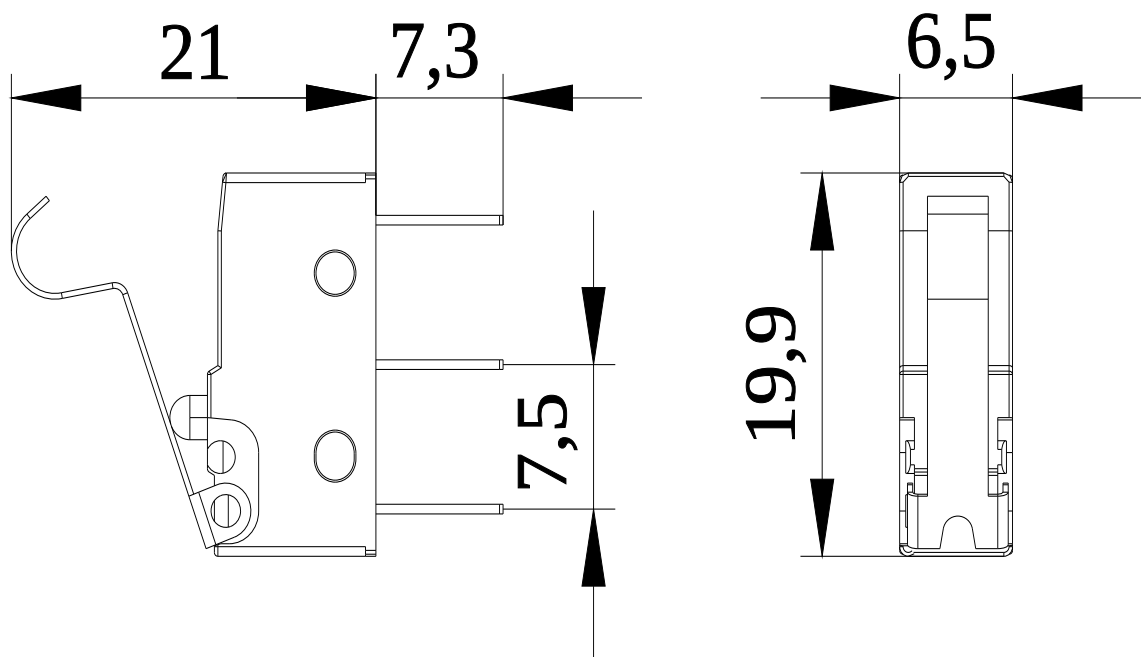

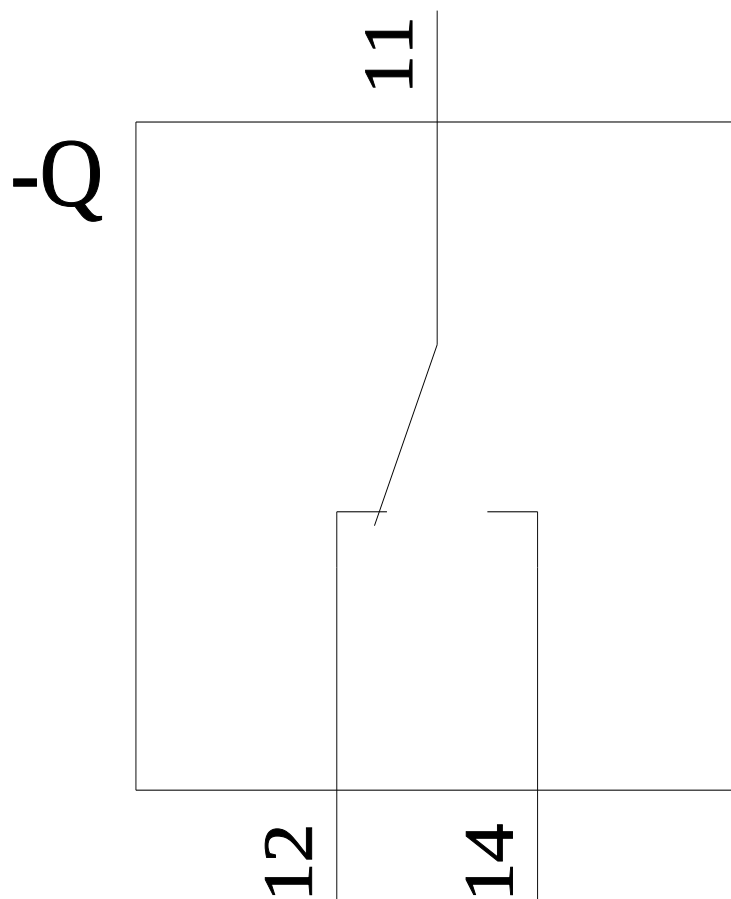

-CR

